

Technical Data Sheet
FIXATION CLAMP FOR LUSA RIDGE TILE


EN

Code	Review	Page
TS.EN.COMP.05	1	Page. 1 de 1

DESCRIPTION

Resistant to atmospheric conditions, fixation clamp for lusa ridge tile has a high resistance in terms of form and function, giving it a long lifespan. The fixation clamp for lusa ridge Tile is applied on the hips and the ridges. Designed specifically for UMBELINO MONTEIRO hip ridge tiles. The rods of the Fixation clamp for lusa ridge Tile are easily foldable, allowing an easy adaptation to the "ridge tile nose". Meanwhile, the holes allow fast and effective fixation upon battens.

Material:	Galvanized Steel
Color:	Red or Black
Geometric Features:	
Length:	145 mm
Width: 1:	12 mm
Width: 2:	80 mm
Thickness:	2 mm
Weight:	100 gr
Yield:	1 unit per ridge tile

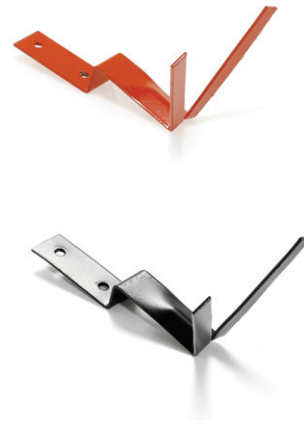

APPLICATION

The clamp should be screwed into the hip batten, piercing the membrane at the top. It is placed with the same measure of overlapping as on the previous ridge tile. Subsequently is applied the following ridge tile. With bendable "rods" that fold, the clamp grabs directly upon the rooftop at the highest zone and on the protruding ceramic piece usually known as the "ridge tile nose".

