


Technical Data Sheet METALLIC PROFILE FOR WALL CLOSURES

EN

Code	Review	Page
TS.EN.COMP.15	1	Page. 1 de 1

DESCRIPTION

Made of 3 mm thickness lacquered aluminium, this piece was designed for closure roofing area of emerging walls. Examples: wall, chimneys, garrets, among others. Work together with closure strips of these key points. The profile is 50 mm with, which corresponds to the height of the wall. Provides an effective finish in tile colour (Natural Red); Due to its geometry, it ensures the effective waterproofing of the closure zone between the wall and the applied strip.

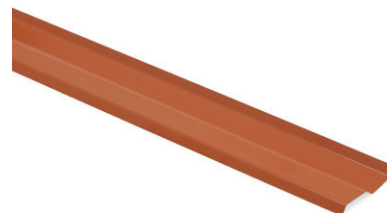

Material:	Aluminium
Color:	Clay Red
Geometric Features:	
Length:	1500 mm
Width:	50 mm
Weight:	1000 gr
Yield:	1 unit per 1,5 m

APPLICATION

The profile should be fixed with a bolt or glued directly to the wall, the drill area should be the furthest from the wall and a line of silicone/sealant should be applied to the upper part of the part on the inside. It can only be glued if the walls are made of stone. It should be drained onto the previously applied aluminium strip for closures or previous applied metallic valley.

